



United States Patent

Shiga et al.

[11] Patent Number: 5,760,485

[45] **Date of Patent:** **Jun. 2, 1998**

[54] STARTER

[75] Inventors: Tsutomu Shiga, Nukata-gun; Nobuyuki Hayashi, Nagoya; Masanori Ohmi, Anjo; Sadayoshi Kajino, Nagoya, all of Japan

[73] Assignee: Nippondenso Co., Ltd., Kariya, Japan

[21] Appl. No.: 600,991

[22] PCT Filed: Dec. 19, 1994

[86] PCT No.: **PCT/JP94/02166**

§ 371 Date: **Mar. 1, 1996**

& 102(c) Date: **Mar. 1, 1996**

[87] PCT Pub. No.: WO96/19662

PCT Pub. Date: Jun. 27, 1996

[51] Int. CL⁶ F02N 11/00; H02P 9/04

[52] U.S. Cl. 290/38 R; 290/48

[58] **Field of Search** 290/38 R, 38 A,
290/38 C, 38 B, 48; 74/6, 7 A, 7 R, 7 E

[56] **References Cited**

U.S. PATENT DOCUMENTS

| | | | |
|-----------|---------|---------------------|---------|
| 4,268,772 | 5/1981 | Workman | 310/197 |
| 4,481,424 | 11/1984 | Hattori et al. | 290/40 |
| 4,674,344 | 6/1987 | Kazino et al. | 747 A |

| | | | |
|-----------|---------|-----------------------|----------|
| 4,819,975 | 4/1989 | Morishita et al. | 290/48 |
| 4,970,908 | 11/1990 | Isozumi et al. | 747 E |
| 5,130,596 | 7/1992 | Umeki | 310/234 |
| 5,508,566 | 4/1996 | Nagao et al. | 290/38 R |

FOREIGN PATENT DOCUMENTS


| | | |
|-----------|---------|--------------------|
| 387 073 | 9/1990 | European Pat. Off. |
| 387 666 | 9/1990 | European Pat. Off. |
| 0 582 429 | 2/1994 | European Pat. Off. |
| 582 429 | 2/1994 | European Pat. Off. |
| 2 614 363 | 10/1988 | France . |
| 3-115776 | 5/1991 | Japan . |

Primary Examiner—Thomas M. Dougherty
Assistant Examiner—Nicholas Ponomarenko
Attorney, Agent, or Firm—Cushman Darby & Cushman IP
 Group of Pillsbury Madison & Sutro LLP

[57] **ABSTRACT**

A starter is provided that includes a starter motor having an armature core with an armature coil wound therearound and an armature shaft for rotatably holding the armature core. A drive shaft is further provided having a pinion that meshes with a ring gear of an engine. A reduction gear mechanism is interposed between the drive shaft and the armature shaft for reducing the rotation relative to the armature shaft to transmit the reduction rotation to the drive shaft. The reduction gear mechanism has a speed reduction ratio of 6:1 to 10:1.

11 Claims, 21 Drawing Sheets

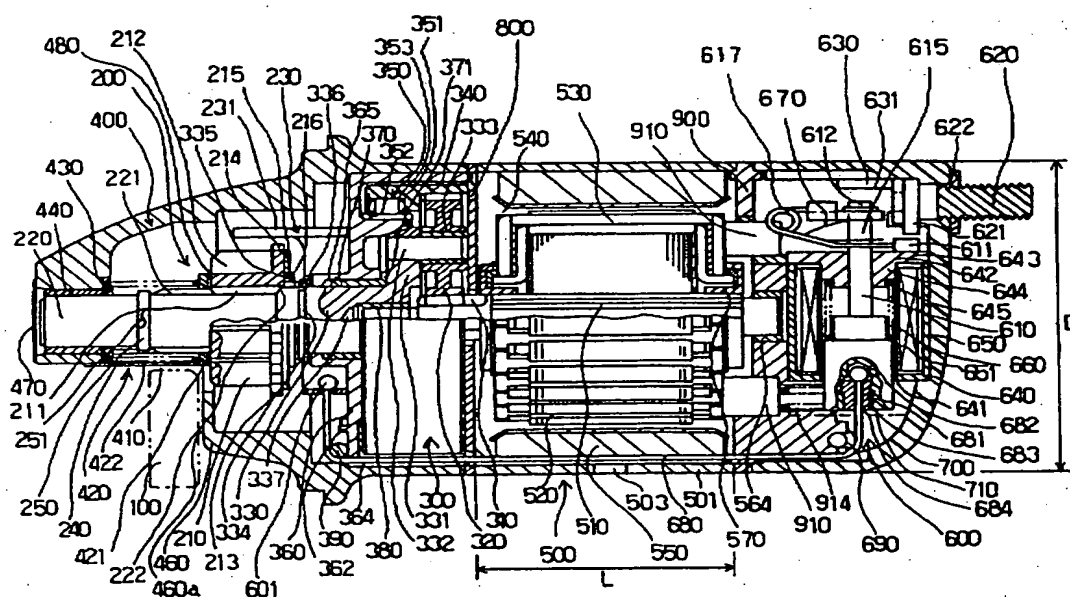

ABSTRACT

A starter is provided that includes a starter motor having an armature core with an armature coil wound therearound and an armature shaft for rotatably holding the armature core. A drive shaft is further provided having a pinion that meshes with a ring gear of an engine. A reduction gear mechanism is interposed between the drive shaft and the armature shaft for reducing the rotation relative to the armature shaft to transmit the reduction rotation to the drive shaft. The reduction gear mechanism has a speed reduction ratio of 6:1 to 10:1.